

Class A

Flowfill Grot GP


Description
 General purpose, non-shrink (Class A) cementitious grout ideal for most void filling grouting jobs.

Application
 Application thickness 20mm – 120mm

Consistency
 May be mixed and applied as a stiff, plastic, flowable or fluid consistency.

Recommended uses

- General purpose cementitious grouting
- Pre-cast and pre-stressed panels
- Grouting in column bases
- Filling core holes, rod holes and defects in concrete
- Filling for hollow block walls
- Caulking of joints and pipes

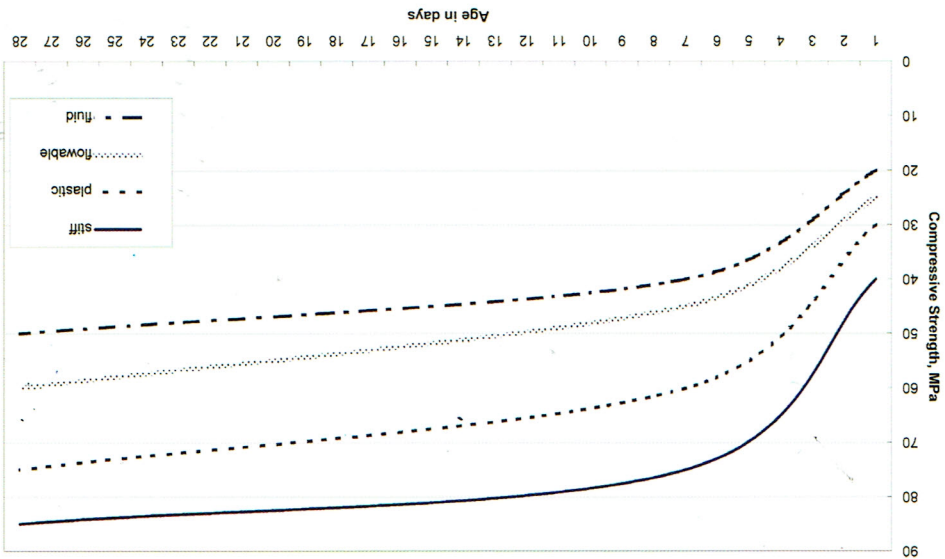

Compressive Strength Gain

Performance