



Vinylester Injection System with ETA Assessment Option 1 for Cracked & Non-Cracked Concrete. AS 5216 Compliant



Suitable Anchor Rods M8 - M30

- Steel 5.8 and 8.8 Zinc Plated and Hot Dip Galvanized
- Stainless Steel A4-50 and A4-70
- High Corrosion Resistant Steel 1.4529



Use Conditions

- Installation in Cracked & Non-Cracked Concrete C20/25 to C50/60 according to EN 206-1:2000 and AS 5216
- For Static and quasi static loading & Seismic Action C1
- In Dry, Wet and Flooded Holes
- Structures subject to dry internal and permanent damp internal conditions.
- Structures subject to external atmospheric exposure.
- Overhead Installation allowed.


Typical Applications

- Infrastructure Construction (Roads, Viaducts, Sound Barriers, Crash Barriers, Harbours, High Rise Construction, Steel Construction)
- Production Facilities (Installation of Cranes, Robots, Conveyor Lines etc.)

Approvals & Test Reports





Installation Procedures

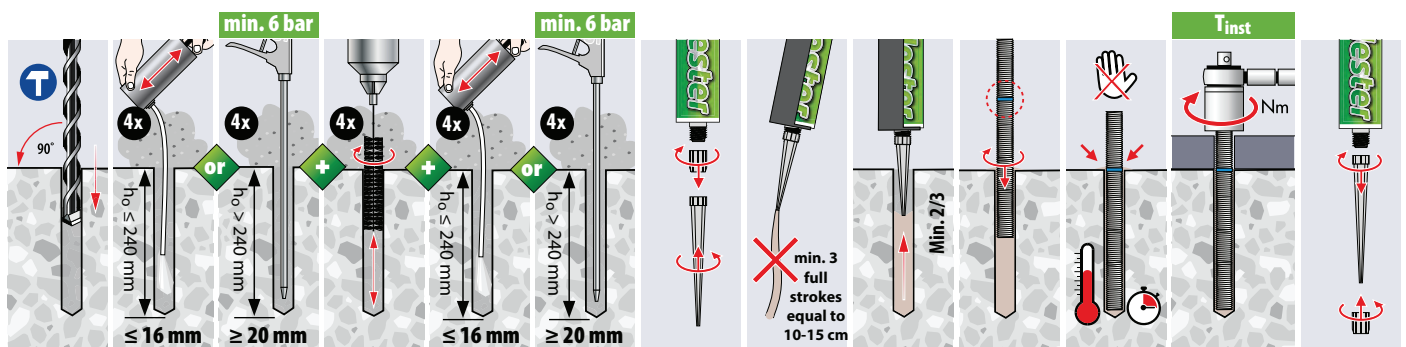


Curing Times

Temperature ¹⁾	-C	-10 ²⁾	-5	0	+5	+10	+20	+30 ³⁾	+35 ³⁾	+40 ³⁾
Processing / Working Time		90 min	90 min	45 min	25 min	15 min	6 min	4 min	2 min	1,5 min
Curing Time Dry Holes		24 h	14 h	7 h	2 h	80 min	45 min	25 min	20 min	15 min
Curing Time Wet Holes		48 h	28 h	14 h	4 h	160 min	90 min	50 min	40 min	30 min

1) Concrete Temperature 2) Cartridge Temperature must be min. +15°C. 3) Cartridge Temperature **must** be under +20°C.





Specification Data for the use in Cracked & Uncracked Concrete and Hammer/Air Drilled Holes according to EN1992-4 & AS 5216

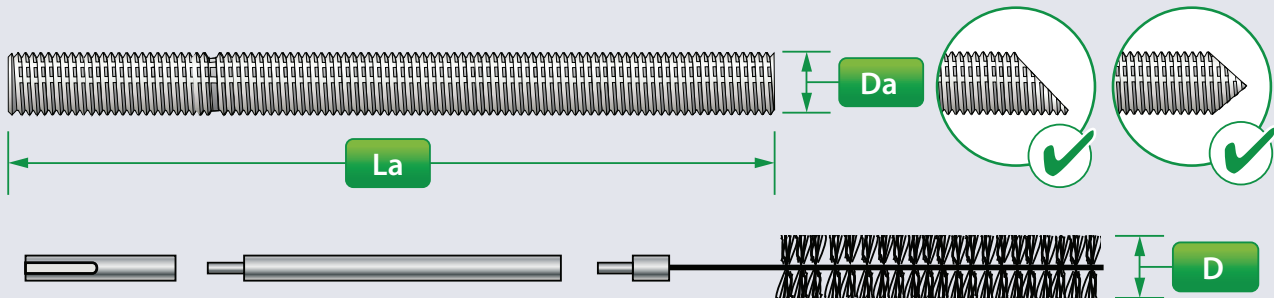

Installation Dimensions

Anchor Size	D _a		M8	M10	M12	M16	M20	M24	M27	M30
Rod Length	La ≥	[mm]	110	130	160	190	260	300	340	360
Effective Anchorage Depth	h_{ef}	[mm]	60-160	60-200	70-240	80-320	90-400	96-480	108-540	120-600
Hole Diameter	d_o	[mm]	10	12	14	18	24	28	32	35
Depth of Drill Hole	h_o	[mm]	80	90	110	125	170	210	240	280
Diameter Fixture Hole	d_f	[mm]	9	12	14	18	22	26	30	33
Fixture Thickness	t_{fix} ≤	[mm]	20	30	35	45	70	65	70	50
Recommended Torque	T_{inst}	[Nm]	10	20	40	80	120	160	180	200
Required Volume per cm Embedment Depth	V_s	[ml/cm]	0,44	0,59	0,75	1,09	2,25	2,87	3,72	4,37

2

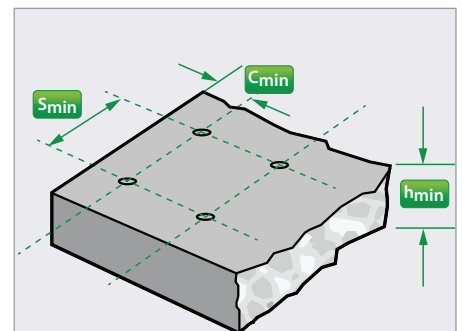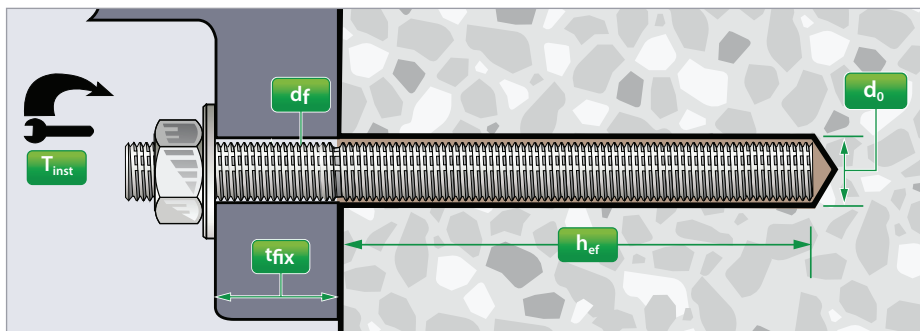

Member Thickness, Edge Distance & Spacing

Anchor Size	D _a		M8	M10	M12	M16	M20	M24	M27	M30
Min. Member Thickness	h_{min}	[mm]	110	120	140	160	220	265	305	350
Min. Edge Distance	C_{min}	[mm]	40	50	60	80	100	120	135	150
Min. Spacing	S_{min}	[mm]	40	50	60	80	100	120	135	150

Steel Brush Dimensions

Anchor Size	D _a		M8	M10	M12	M16	M20	M24	M27	M30
Brush Diameter	D	[mm]	12	14	16	20	26	30	34	37
Min. Brush Diameter	D_{min}	[mm]	10,5	12,5	14,5	18,5	24,5	28,5	32,5	35,5



Performance Data¹⁾ for Hammer/Air Drilled Holes

Steel Failure

- Performance Data:** Loads in kN for a single anchor in Concrete C20/C25*. Temperature 24°C/40°C for long/short term.
No influence of Edge- or Center to Center Distances.
Increasing factors for concrete ψ_c : **C30/37:** 1,04 **C40/50:** 1,08 **C50/60:** 1,10
- Shear Loads:** Steel strength in kN without bending moment.
- Recommended Loads** incl. Safety factor $\gamma_G = 1,4$.

Characteristic Resistance Dry/Wet Holes

Non-Cracked Concrete		D _a		M8	M10	M12	M16	M20	M24	M27	M30
Steel 5.8	Tensile	N_{Rk}	[kN]	18,0	29,0	42,0	75,4	123,0	174,2	212,1	237,5
	Shear ²⁾	V_{Rk}	[kN]	9,0	14,0	21,0	39,0	61,0	88,0	115,0	140,0
Steel 8.8	Tensile	N_{Rk}	[kN]	20,1	33,9	49,8	75,4	128,2	174,2	212,1	237,5
	Shear ²⁾	V_{Rk}	[kN]	15,0	23,0	34,0	63,0	98,0	141,0	184,0	224,0
A4-50	Tensile	N_{Rk}	[kN]							212,1	237,5
	Shear ²⁾	V_{Rk}	[kN]							115,0	140,0
A4-70	Tensile	N_{Rk}	[kN]	20,1	33,9	49,8	75,4	128,2	174,2		
	Shear ²⁾	V_{Rk}	[kN]	13,0	20,0	30,0	55,0	86,0	124,0		
Cracked Concrete		D _a		M8	M10	M12	M16	M20	M24	M27	M30
Steel 5.8	Tensile	N_{Rk}	[kN]			22,8	34,6	58,7	87,1	137,8	171,5
	Shear ²⁾	V_{Rk}	[kN]			21,0	39,0	61,0	88,0	115,0	140,0
Steel 8.8	Tensile	N_{Rk}	[kN]			22,8	34,6	58,7	87,1	137,8	171,5
	Shear ²⁾	V_{Rk}	[kN]			34,0	63,0	98,0	141,0	184,0	224,0
A4-50	Tensile	N_{Rk}	[kN]							137,8	171,5
	Shear ²⁾	V_{Rk}	[kN]							115,0	140,0
A4-70	Tensile	N_{Rk}	[kN]			22,8	34,6	58,7	87,1		
	Shear ²⁾	V_{Rk}	[kN]			30,0	55,0	86,0	124,0		

3

Characteristic Resistance Flooded Holes

Non-Cracked Concrete		D _a		M8	M10	M12	M16	M20	M24	M27	M30
Steel 5.8	Tensile	N_{Rk}	[kN]	15,1	24,0	35,2	53,4				
	Shear ²⁾	V_{Rk}	[kN]	9,0	14,0	21,0	39,0				
Steel 8.8	Tensile	N_{Rk}	[kN]	15,1	24,0	35,2	53,4				
	Shear ²⁾	V_{Rk}	[kN]	15,0	23,0	34,0	63,0				
A4-50	Tensile	N_{Rk}	[kN]								
	Shear ²⁾	V_{Rk}	[kN]								
A4-70	Tensile	N_{Rk}	[kN]	15,1	24,0	35,2	53,4				
	Shear ²⁾	V_{Rk}	[kN]	13,0	20,0	30,0	55,0				
Cracked Concrete		D _a		M8	M10	M12	M16	M20	M24	M27	M30
Steel 5.8	Tensile	N_{Rk}	[kN]			22,8	34,6				
	Shear ²⁾	V_{Rk}	[kN]			21,0	39,0				
Steel 8.8	Tensile	N_{Rk}	[kN]			22,8	34,6				
	Shear ²⁾	V_{Rk}	[kN]			34,0	63,0				
A4-50	Tensile	N_{Rk}	[kN]								
	Shear ²⁾	V_{Rk}	[kN]								
A4-70	Tensile	N_{Rk}	[kN]			22,8	34,6				
	Shear ²⁾	V_{Rk}	[kN]			30,0	55,0				



Performance Data¹⁾ for Hammer/Air Drilled Holes

Steel Failure

Design Resistance Dry/Wet Holes

Non-Cracked Concrete		D _a		M8	M10	M12	M16	M20	M24	M27	M30
Steel 5.8	Tensile	N _{Rd}	[kN]	12,0	18,8	27,6	39,2	62,1	85,4	110,8	131,9
	Shear ²⁾	V _{Rd}	[kN]	7,2	11,2	16,8	31,2	48,8	70,4	92,0	112,0
Steel 8.8	Tensile	N _{Rd}	[kN]	13,4	18,8	27,6	39,2	62,1	85,4	110,8	131,9
	Shear ²⁾	V _{Rd}	[kN]	12,0	18,4	27,2	50,4	78,4	112,8	147,2	179,2
A4-50	Tensile	N _{Rd}	[kN]							80,1	97,9
	Shear ²⁾	V _{Rd}	[kN]							48,3	58,8
A4-70	Tensile	N _{Rd}	[kN]	13,4	18,8	27,6	39,2	62,1	85,4		
	Shear ²⁾	V _{Rd}	[kN]	8,3	12,8	19,2	35,3	55,1	79,5		
Cracked Concrete		D _a		M8	M10	M12	M16	M20	M24	M27	M30
Steel 5.8	Tensile	N _{Rd}	[kN]			12,7	19,2	32,6	48,4	76,6	93,7
	Shear ²⁾	V _{Rd}	[kN]			16,8	31,2	48,8	70,4	92,0	112,0
Steel 8.8	Tensile	N _{Rd}	[kN]			12,7	19,2	32,6	48,4	76,6	93,7
	Shear ²⁾	V _{Rd}	[kN]			27,2	50,4	78,4	112,8	147,2	179,2
A4-50	Tensile	N _{Rd}	[kN]							76,6	93,7
	Shear ²⁾	V _{Rd}	[kN]							48,3	58,8
A4-70	Tensile	N _{Rd}	[kN]			12,7	19,2	32,6	48,4		
	Shear ²⁾	V _{Rd}	[kN]			19,2	35,3	55,1	79,5		

4 Design Resistance Flooded Holes

Non-Cracked Concrete		D _a		M8	M10	M12	M16	M20	M24	M27	M30
Steel 5.8	Tensile	N _{Rd}	[kN]	7,2	11,4	16,8	25,4				
	Shear ²⁾	V _{Rd}	[kN]	7,2	11,2	16,8	31,2				
Steel 8.8	Tensile	N _{Rd}	[kN]	7,2	11,4	16,8	25,4				
	Shear ²⁾	V _{Rd}	[kN]	12,0	18,4	27,2	50,4				
A4-50	Tensile	N _{Rd}	[kN]								
	Shear ²⁾	V _{Rd}	[kN]								
A4-70	Tensile	N _{Rd}	[kN]	7,2	11,4	16,8	25,4				
	Shear ²⁾	V _{Rd}	[kN]	8,3	12,8	19,2	35,3				
Cracked Concrete		D _a		M8	M10	M12	M16	M20	M24	M27	M30
Steel 5.8	Tensile	N _{Rd}	[kN]			10,9	16,5				
	Shear ²⁾	V _{Rd}	[kN]			16,8	31,2				
Steel 8.8	Tensile	N _{Rd}	[kN]			10,9	16,5				
	Shear ²⁾	V _{Rd}	[kN]			27,2	50,4				
A4-50	Tensile	N _{Rd}	[kN]								
	Shear ²⁾	V _{Rd}	[kN]								
A4-70	Tensile	N _{Rd}	[kN]			10,9	16,5				
	Shear ²⁾	V _{Rd}	[kN]			19,2	35,3				



Performance Data¹⁾ for Hammer/Air Drilled Holes

Steel Failure

Recommended Loads Dry/Wet Holes

Non-Cracked Concrete		D _a		M8	M10	M12	M16	M20	M24	M27	M30
Steel 5.8	Tensile	N _{rec}	[kN]	8,6	13,5	19,7	28,0	50,9	69,1	79,1	94,2
	Shear ²⁾	V _{rec}	[kN]	5,1	8,0	12,0	22,3	34,9	50,3	65,7	80,0
Steel 8.8	Tensile	N _{rec}	[kN]	9,6	13,5	19,7	28,0	50,9	69,1	79,1	94,2
	Shear ²⁾	V _{rec}	[kN]	8,6	13,1	19,4	36,0	56,0	80,6	105,1	128,0
A4-50	Tensile	N _{rec}	[kN]							57,2	69,9
	Shear ²⁾	V _{rec}	[kN]							34,5	42,0
A4-70	Tensile	N _{rec}	[kN]	9,6	13,5	19,7	28,0	50,9	69,1		
	Shear ²⁾	V _{rec}	[kN]	6,0	9,2	13,7	25,2	39,4	56,8		
Cracked Concrete		D _a		M8	M10	M12	M16	M20	M24	M27	M30
Steel 5.8	Tensile	N _{rec}	[kN]			9,1	13,7	23,3	34,6	54,7	66,9
	Shear ²⁾	V _{rec}	[kN]			12,0	22,3	34,9	50,3	65,7	80,0
Steel 8.8	Tensile	N _{rec}	[kN]			9,1	13,7	23,3	34,6	54,7	66,9
	Shear ²⁾	V _{rec}	[kN]			19,4	36,0	56,0	80,6	105,1	128,0
A4-50	Tensile	N _{rec}	[kN]							54,7	66,9
	Shear ²⁾	V _{rec}	[kN]							34,5	42,0
A4-70	Tensile	N _{rec}	[kN]			9,1	13,7	23,3	34,6		
	Shear ²⁾	V _{rec}	[kN]			13,7	25,2	39,4	56,8		

Recommended Loads Flooded Holes

5

Non-Cracked Concrete		D _a		M8	M10	M12	M16	M20	M24	M27	M30
Steel 5.8	Tensile	N _{rec}	[kN]	5,1	8,2	12,0	18,2				
	Shear ²⁾	V _{rec}	[kN]	5,1	8,0	12,0	22,3				
Steel 8.8	Tensile	N _{rec}	[kN]	5,1	8,2	12,0	18,2				
	Shear ²⁾	V _{rec}	[kN]	8,6	13,1	19,4	36,0				
A4-50	Tensile	N _{rec}	[kN]								
	Shear ²⁾	V _{rec}	[kN]								
A4-70	Tensile	N _{rec}	[kN]	5,1	8,2	12,0	18,2				
	Shear ²⁾	V _{rec}	[kN]	6,0	9,2	13,7	25,2				
Cracked Concrete		D _a		M8	M10	M12	M16	M20	M24	M27	M30
Steel 5.8	Tensile	N _{rec}	[kN]			7,8	11,8				
	Shear ²⁾	V _{rec}	[kN]			12,0	22,3				
Steel 8.8	Tensile	N _{rec}	[kN]			7,8	11,8				
	Shear ²⁾	V _{rec}	[kN]			19,4	36,0				
A4-50	Tensile	N _{rec}	[kN]								
	Shear ²⁾	V _{rec}	[kN]								
A4-70	Tensile	N _{rec}	[kN]			7,8	11,8				
	Shear ²⁾	V _{rec}	[kN]			13,7	25,2				



Vinylester

ICCONS®

Serious Connections®

ICCONS®

Serious Connections®

DESIGN PRO

ADVANCED ANCHOR DESIGN SOFTWARE



Download DesignPRO

AS 5216:2021 COMPLIANT NCC ANCHOR DESIGN

IT'S EASY AND FREE

- ✓ Fast software download and it's easy and FREE!
- ✓ **ICCONS®** DesignPRO Anchoring Software complying with AS 5216:2021
 - Includes Design of fastenings under seismic actions
 - Includes Design of redundant non-structural system
 - Combined loading and displacement calculations
- ✓ Unique all-in-one screen interface with easy data input and results display
- ✓ Interactive 3D model display for clear anchor and baseplate layout including rotation functionality
- ✓ Integrated FEA (Finite Element Analysis) for quick base plate thickness calculations
- ✓ Offers design solutions for rigid and elastic baseplates
- ✓ Flexible custom anchor and base plate geometry design for complex shapes and applications
- ✓ Utilizes Australian steel profiles and material grades
- ✓ All product and all failure modes individually checked for precise anchor analysis and selection
- ✓ Summary or detailed design report options available to save or print

FREE DOWNLOAD for DesignPRO using the following link www.iccons.com.au/software/design-pro
For further support, training and information please contact engineering@iccons.com.au



www.iccons.com.au

