


1016 5th Ave NE Unit #1
 West Fargo, ND 58078
 Phone (701) 281-8989
 Fax (701) 281-8995
www.luraconcretescreed.com

The Leaders in Roller Screed Innovation

Lightning Strike Roller Screed Specifications Sheet

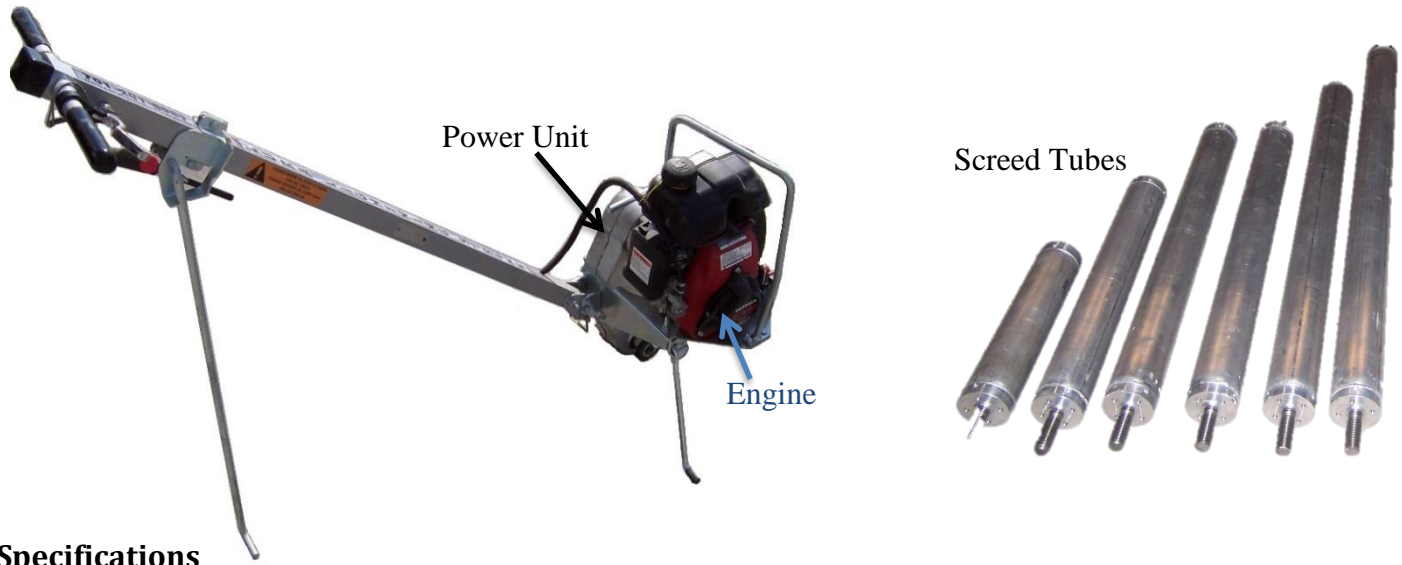

Specifications

Engine Type:	Air-cooled, 4-Stroke, OHV, single cylinder
Net Horse Power Output*:	1.6kW (2.1HP) at 7,000 rpm
Net Torque:	2.7 Nm (2.0 lbs. ft.) at 4,500 rpm
Fuel Tank Capacity (liter):	0.77l (0.81 US qt)
Engine Dry Weight:	5.5 kg (12.1 lbs.)
Engine Dimensions (L x W x H):	225mm(8.9 in) x 274mm (10.8 in) x 353mm (13.9in)
Power Unit Weight (50cc):	22.67 kg (50 lbs.)
Power Unit Dimensions (L x W x H):	191mm(7.5 in) x 1778mm(7in) x 406mm(16in)
Screed Tube Dry Weight:	5lbs (2.3 kg) per linear foot
Screed Tube Dimensions (W x H):	4.5 x 4.5 in (11.4 x 11.4 cm)-Various Lengths
Available Lengths ft. (m)	2' (.61), 3' (.91), 4' (1.22), 6' (1.83), 8' (2.44), 10' (3.05), 12' (3.66), 14' (4.28), 16' (4.88), 18' (5.49), and 20' (6.1)
	*Customizable in various lengths up to 26'
Screed Tube Material:	60-61 Schedule 40 Non-Ferrous Tubing